
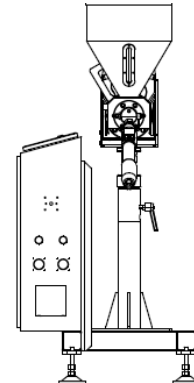


DR-SS-30/25D - DR-SS-35/25D Single Screw-Strip Extruder

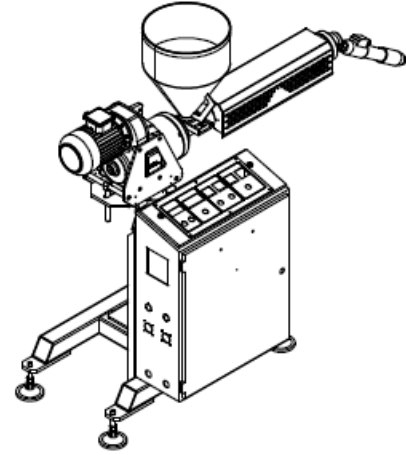

Features & Specifications

Extruder Capacity (Kg/Hr):	5-7-15
Screw Dia (mm):	30/35
Length of Screw (L/D Ratio):	25
Heating Zones:	2-3 for Barrel+2 for flexible hose
Screw+Barrel Material:	Nitrated DIN 1.8850
Screw Rpm (min-1):	27-119
Main Motor Power (Kw):	1.1-1.5-5.5KW Siemens
Gear Box:	Zambello / ITALY or Yilmaz / Turkey
Control Unit:	On Main Extruder HMI or Manual with Contactor
Temp Control:	Cooling - Heating PID Control
Type Driver:	AC Synchronize
Installed pressure sensor to extruder:	GEFRAN / ITALY
Flexible Hose:	Optional (500-700mm)
Setup:	Standalone or on existing extruder frames.
Up-down movement:	Manual Adjustment

*certain exceptions to certain extruders specification may be found.

**Extruder Capacity may change depending on material type